Easy control of menu items with removable keyboards



 Four different key layouts are created per removable flat keyboard and up to eight types of layouts (standard: one to four) available used for various applications such as quick menu change, happy hour, manager/normal operators, drinks/ foods, lunch/dinner, etc.

Data saving/loading by compact flash card

 Programming data is saved in the compact flash card and loaded to the QT-2100.



Barcode reading function

Auto check number generation

Store and recall function

Transfer the sub total with date for hotel posting application

Automatic consolidation of sales data by scheduler activation

Various report functions

- Fixed totalizer, Free function
- Sub-department, Department
- PLU. PLU stock
- Table analysis, Open check
- · Hourly, Hourly item, Monthly
- Employee time and attendance
- Clerk management
- Flash report
- riasii iepoit
- Group report
- Electronic journal
- Void reason

X/Z BROWN	10-10-2006 21	MC #01	 Machine No. Mode/Clerk/Date/Time/Consecutive No.
x 0050025	DPEN DHK -		Mode Symbol/Report Code/Report Title
DIECK No. 1 NEW OPEN		.0.00	Opened Check For New Customer
RES YOUNG CHECK No.2	10-10-2005 22	+60 000003 -88.00	New Balanced Check
REG YOUNG DHECK No.33 FINALIZED REG SHETH CHECK NO.4 BUSY	10-10-2005 22	MC #02 :42 000004 .O.OO	Finalized Check Waiting For Issuing Guest Receipt Busy Check
REG SMITH CHECK No.5	10-10-2006 20		
REG SMITH CHECK NO.ES FINALIZED	10-10-2003 16	-O.OO	
REG SHITH CHECK No. 7	10-10-2003 16		
~~~	~~~	~~~	
REG CAMERON CHECK No. 25	10-10-2006 21	HC #01 :04 000109 -98.00	
REG CAMERON DHECK No. 246	10-10-2006 21	HC 601 :05 000111 -67.50	
fL.	No 14	-1,217.00	No. Of Opened Check/Total Amount

#### List of options

Model No.	Product	
CLK-K22	Clerk key kit (6 clerks)	
HHS-15	Hand-held scanner	
UP-250	External impact type printer	
UP-350	External thermal type printer	
PS-170	Power supply unit for UP-250/350 (AC 100 to 240V)	
MDL-11	Multi-drawer kit	
QT-2130RAM	Memory expansion board (4MB)	
QT-2046MC	Magnetic card reader	
QT-2160D*	Rear customer display	
QT-2061S	Pole for QT-2163D	
QT-2162S	5m cable set for remote display	
QT-2163D*	Remote display	
PRT-CB-8A	External printer cable (3m)	
PRT-CB-8B	External printer cable (5m)	
SH-KIT8	Sheet holder kit (No.1 to 4) one holder	
SP-1300	Slip printer	
PRT-CB-8C	Slip printer cable	
PRL-CB-2	PC cable	
WT-81	Sheet Cover	


*The both the QT-2160D and QT-2163D can not be used at the same time.

#### **Specifications**

Memory backu	ip .	30 days data back up (Vanadium lithium battery)
Display	Operator	LCD display, 320×240 dots
	Customer (Option)	2 lines×20 digits dot display
Power consumption	Input AC 120V	Operating 0.6A, Stand-by 0.15A
	Input AC 230V	Operating 0.4A. Stand-by 0.09A
Environment	Operating temperature	0 to 40°C
	Operating humidity	10 to 90%RH
Dimensions	Marie Marie	270(W)×406(D)×116 (264)**(H) mm
Weight		4.4Kg

"Includes height of the operator display

#### http://world.casio.com





CASIO COMPUTER CO., LTD Tokyo, Japan BA0201-035001A Printed in Japan

### CASIO.

# High-performance meets expandability and powerful networking for your business solution



Modular Terminal



## Quick response modular terminal with excellent design meets today's hospitality environment

High performance CPU with multi-task operating system.

• Large memory capacity to support most customer requirements with 4MB of ram as standard.

The QT-2100 has been designed with a highly flexible system configuration to meet various types of hospitality market demands. It is equipped with six RS-232C ports to support a wide range of peripheral devices such as remote printers, bar code scanner, customer display, modem and PC direct connection. In-line communications are available for communications between QT-2100's using LAN cable (CAT5), which make installation and adding terminals

Easy to read with large and clear multi-line LCD provides simple and accurate opera-


- 14 lines with 40-character display.
- LCD with back-light and adjustable contrast and brightness gives best viewing of the dis-
- The display scrolling capability shows registered items on the display and enables a clerk to perform an accurate void operation by pointing a cursor to the target item.



• The pulldown group window contains up to 20 items with eight items per page



 Sales data can be quickly checked on the LCD during business hours.

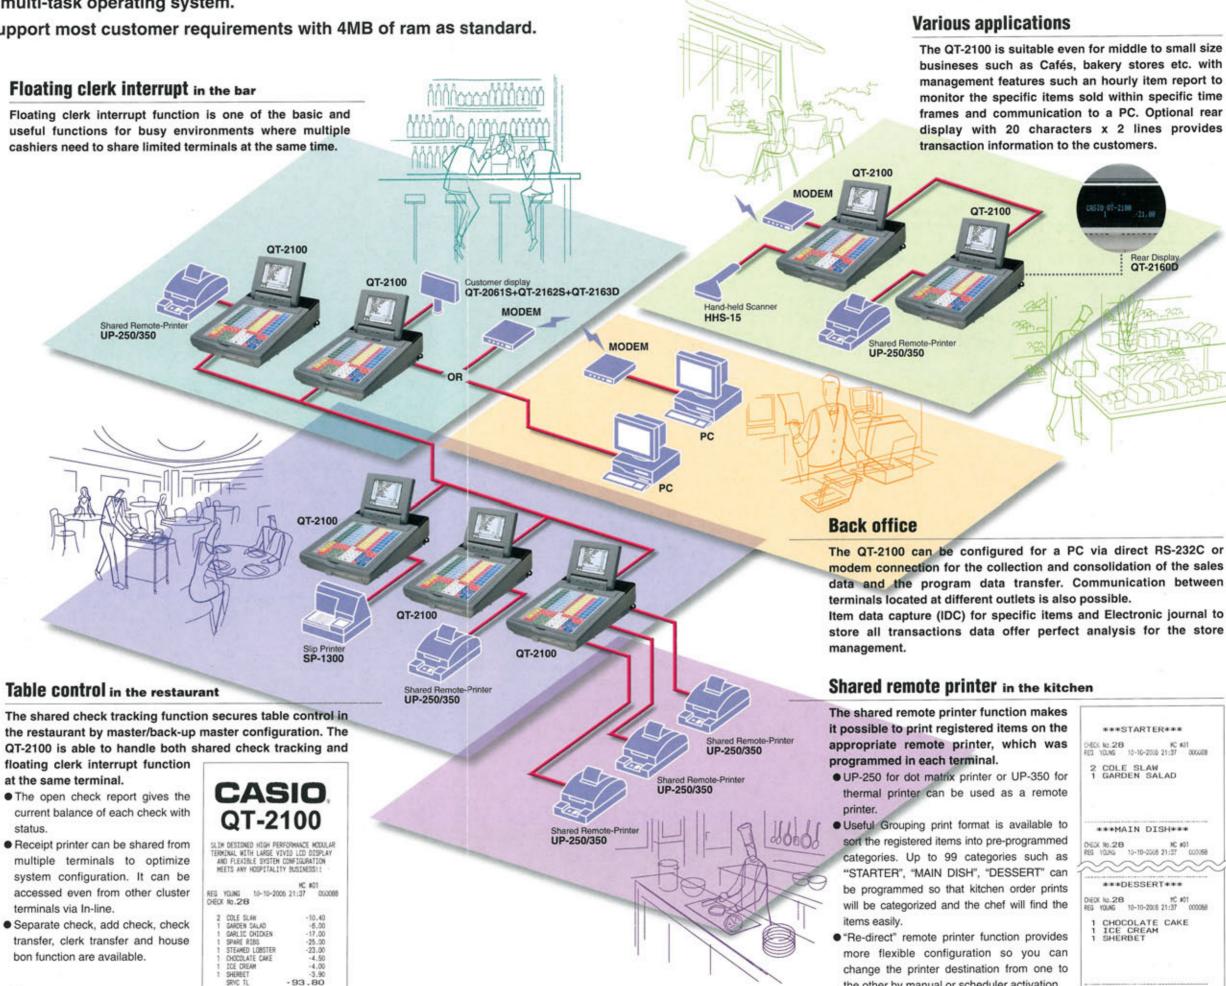

**Various applications** 

QT-2100

QT-2100

UP-250/350

The QT-2100 is suitable even for middle to small size busineses such as Cafés, bakery stores etc. with management features such an hourly item report to monitor the specific items sold within specific time frames and communication to a PC. Optional rear display with 20 characters x 2 lines provides transaction information to the customers.

**Back office** The QT-2100 can be configured for a PC via direct RS-232C or modem connection for the collection and consolidation of the sales data and the program data transfer. Communication between terminals located at different outlets is also possible. Item data capture (IDC) for specific items and Electronic journal to

#### Shared remote printer in the kitchen

The shared remote printer function makes it possible to print registered items on the appropriate remote printer, which was programmed in each terminal.

- UP-250 for dot matrix printer or UP-350 for thermal printer can be used as a remote
- · Useful Grouping print format is available to sort the registered items into pre-programmed categories. Up to 99 categories such as "STARTER", "MAIN DISH", "DESSERT" can be programmed so that kitchen order prints will be categorized and the chef will find the
- · "Re-direct" remote printer function provides more flexible configuration so you can change the printer destination from one to the other by manual or scheduler activation.

